


Efficient Lighting Systems manufactures a wide range of commercial lighting fixtures. Other brochures are available including the following.

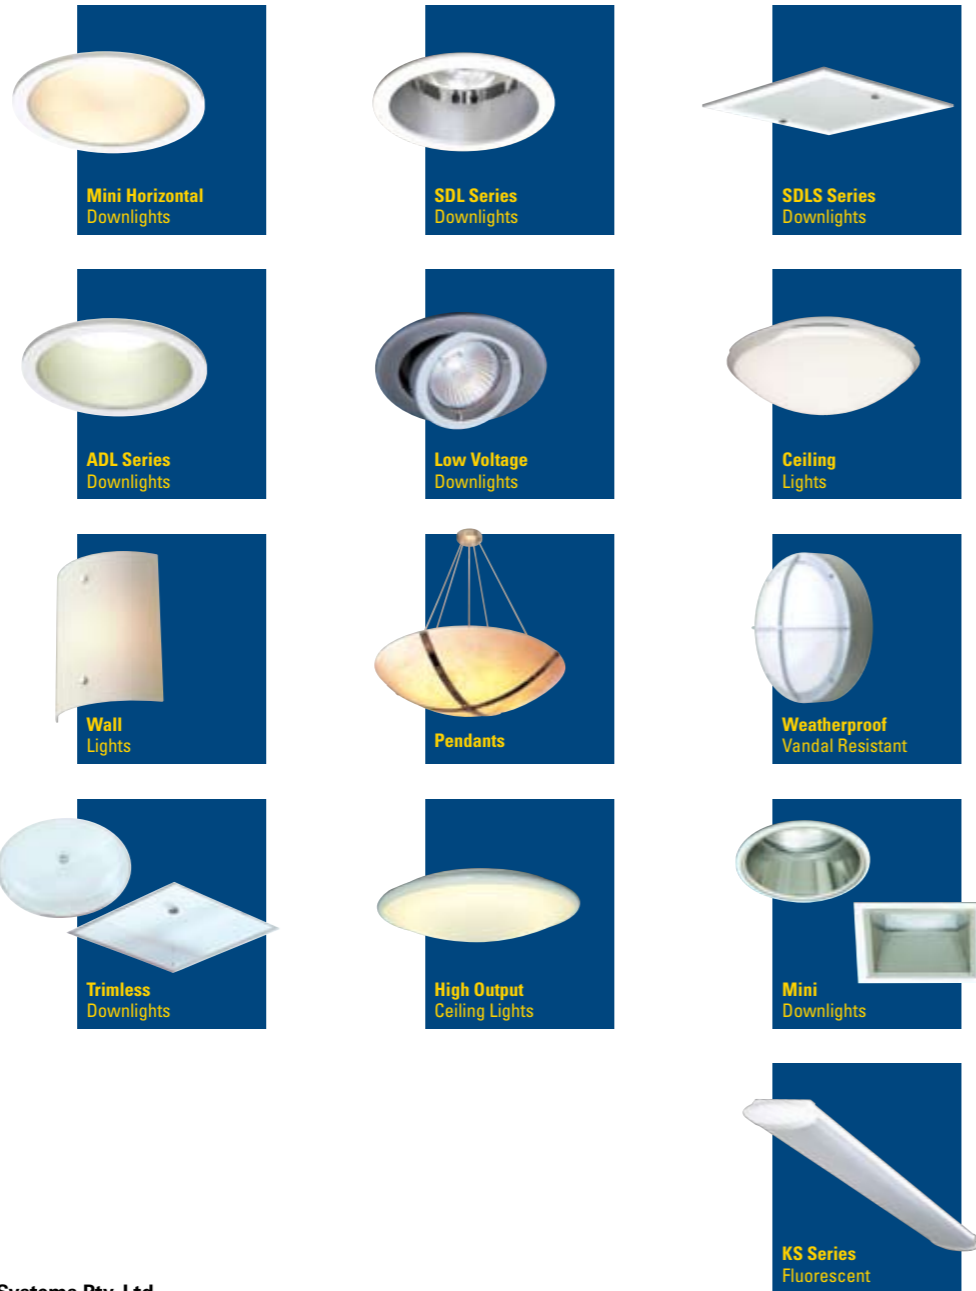

**Efficient Lighting Systems Pty. Ltd.**  
 ABN 14 050 028 209  
**39 Tinning Street, Brunswick, Victoria 3056 Australia**  
**PO Box 5084 Moreland West, Victoria 3055 Australia**  
**Telephone: 61 3 9222 5522**  
**Facsimile: 61 3 9222 5521**  
**Email: info@elslighting.com.au**  
**Web: www.elslighting.com.au**

**Distributed by:**

REGISTERED TRADEMARK  
 ELS and the logo are registered trademarks of Efficient Lighting Systems Pty. Ltd.

WARNING The data contained herein is supplied and you access and use the data strictly on condition that:

(i) except as may otherwise be provided by law, Efficient Lighting Systems ("ELS") shall not be under any liability whether in contract, tort or otherwise for any injury, damage or loss, including consequential damage or loss whether to persons or property, which is caused or contributed to by any error or omission in the data.

(ii) the data and the light fitting designs to which the data relates may change from time to time and ELS is not obliged to notify you of any such change and shall not be liable for failing to notify you.

(iii) the data is intended to be used in lighting designs which incorporate products supplied by ELS and must not be used for any other products.

(iv) the data may only be used by the person for whom it was intended and then only for the intended use.

(v) the data and copyright therein remains the property of ELS and the copying or duplication of the data is prohibited. ELS 2004



security light



www.elslighting.com.au

## Security Light

The Security light is a recessed high efficiency fluorescent light fitting for use in areas that may be subject to vandalism or inadvertent impact. The design ensures the rigidity of the light fitting and the impact resistance 6mm lens protects the lamps from damage.


### Typical uses include

- Correctional facilities
- Police stations and holding cells
- Sporting / Multipurpose halls
- Rail and transport centres
- Public areas

### Single HO lamps for high efficiency

The single lamp versions offer the highest efficiency. As an example it is recommended to use the single high output 24w or 54w rather than the 2x14w or 2x28w versions.

cd/1000 lms

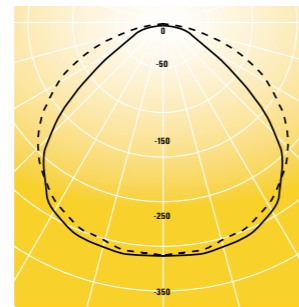

SLR1200150.28.53  
**LOR 78.1% - THIS IS AN EXTRACT FROM NATA TEST REPORT TR\_PL0173. COPY OF FULL TEST REPORT AVAILABLE ON REQUEST.**

### Emergency Lighting Versions

The Security light has been tested and certified to AS/NZS 2293 emergency lighting standard.

The emergency lighting versions of the Security light are fully self contained within the light fitting using Stanilite emergency gear, or Stanilite Nexus monitoring emergency gear.

### Emergency Lighting Classifications

#### SLR600150.14.53.NE

Thermal test report LL0904106T  
 Photometric classification test report LL12551  
 CO - C32 C90 - D20  
 Single maintained lamp

#### SLR1200150.228.53.NE

Thermal test report LL0912806T  
 Photometric classification test report LL12817  
 CO - D20 C90 - D20

Both lamps operate with normal supply, one lamp is illuminated on power failure.

## SLR 600


### Features Include

- T5 high efficiency and high output fluorescent lamps
- 1.5mm steel construction powder coated
- Trim fixed with vandal resistant stainless steel screws
- 6mm clear polycarbonate lens
- Emergency version available

### How to order

SLR 600	Gear	Lamp Wattage	Length (mm)
SLR600150.14.53	HF	1 X 14W HE	623
SLR600150.14.54	1-10V DIM	1 X 14W HE	623
SLR600150.14.55	DSI DIM	1 X 14W HE	623
SLR600150.14.56	DALI DIM	1 X 14W HE	623
SLR600150.214.53	HF	2 X 14W HE	623
SLR600150.214.54	1-10V DIM	2 X 14W HE	623
SLR600150.214.55	DSI DIM	2 X 14W HE	623
SLR600150.214.56	DALI DIM	2 X 14W HE	623
SLR600150.24.53	HF	1 X 24W HO	623
SLR600150.24.54	1-10V DIM	1 X 24W HO	623
SLR600150.24.55	DSI DIM	1 X 24W HO	623
SLR600150.24.56	DALI DIM	1 X 24W HO	623

SLR 600 Emergency	Gear	Lamp Wattage	Length (mm)
SLR600150.14.53.NE NEXUS MONITORED EMERGENCY	HF	1 X 14W HE	623
SLR600150.14.53.ME STANDARD EMERGENCY	HF	1 x 14W HE	623

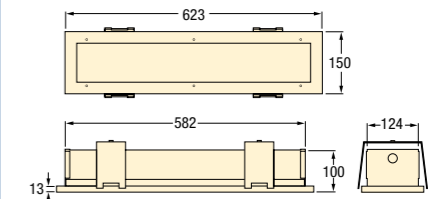

For overall height of fittings allow for brackets depending on thickness of ceiling  
 Cut out 590mm x 130mm

## SLR 1200


### Features Include

- T5 high efficiency and high output fluorescent lamps
- 1.5mm steel construction powder coated
- Trim fixed with vandal resistant stainless steel screws
- 6mm clear polycarbonate lens
- Emergency version available

### How to order

SLR 1200	Gear	Lamp Wattage	Length (mm)
SLR1200150.28.53	HF	1 X 28W HE	1223
SLR1200150.28.54	1-10V DIM	1 X 28W HE	1223
SLR1200150.28.55	DSI DIM	1 X 28W HE	1223
SLR1200150.28.56	DALI DIM	1 X 28W HE	1223
SLR1200150.228.53	HF	2 X 28W HE	1223
SLR1200150.228.54	1-10V DIM	2 X 28W HE	1223
SLR1200150.228.55	DSI DIM	2 X 28W HE	1223
SLR1200150.228.56	DALI DIM	2 X 28W HE	1223
SLR1200150.54.53	HF	1 X 54W HO	1223
SLR1200150.54.54	1-10V DIM	1 X 54W HO	1223
SLR1200150.54.55	DSI DIM	1 X 54W HO	1223
SLR1200150.54.56	DALI DIM	1 X 54W HO	1223

SLR 1200 Emergency	Gear	Lamp Wattage	Length (mm)
SLR1200150.228.53.NE NEXUS MONITORED EMERGENCY	HF	2 X 28W HE	1223
SLR1200150.228.53.ME STANDARD EMERGENCY	HF	2 x 28W HE	1223

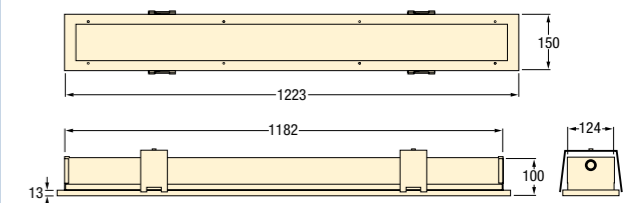

For overall height of fittings allow for brackets depending on thickness of ceiling  
 Cut out 1190mm x 130mm